



**FIXED (PERMANENT)**  
TYPE III BARRICADE



TYPE I BARRICADE

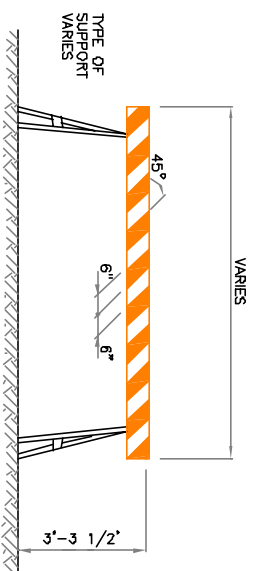

**MOVABLE (TEMPORARY)**  
TYPE III BARRICADE



TYPE II BARRICADE

**BARRICADE NOTES:**

TYPE	I	II	III
WIDTH OF RAIL	8" MIN. 12" MAX.	8" MIN. 12" MAX.	8" MIN. 12" MAX.
LENGTH OF RAIL	2' MIN.	2' MIN.	4' MIN.
HEIGHT	3' MIN.	3' MIN.	5' MIN.
TYPE OF FRAME	DEMOUNTABLE OR HEAVY "A"	LIGHT "A" FRAME	POST OR SKIDS
FLEXIBILITY	ESSENTIALLY IMMOVABLE	PORTABLE	ESSENTIALLY PERMANENT

**STRIPE NOTES:**  
ORANGE & WHITE IF TEMPORARY.  
RED & WHITE IF PERMANENT.  
REFLECTORIZED  
SLANT DOWNWARD, RIGHT OR LEFT,  
IN DIRECTION TRAFFIC WILL PASS.  
SLANT BOTH DIRECTIONS FROM MIDDLE  
IF TRAFFIC PASSES BOTH ENDS.  
WIDTH 6" EXCEPT 4" IF RAILS ARE  
LESS THAN 3' LONG.  
SLANT DOWNWARD TO MIDDLE AT END  
OF CLOSED ROAD.  
SEE SEC. 5.07 AND MUTCD SEC.6C-8.

NOTE:  
FOR DIMENSIONS NOT  
SHOWN, SEE TABLE.